

CHRONO CARBON R, BLUE MARLIN/CARBON/RACING SILVER, 2023

obj. č.: 010.23029

Doporučená cena

74.999 Kč

Akční cena

55.999 Kč



Technické specifikace

vyráběné velikosti

S: 395mm / M: 430mm / L: 470mm / XL: 520mm

vidlice

Fox 32 29 Float GRIP EVOL Rhythm, 100mm, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: remote 2pos Push-unlock, low-speed rebound, air preload, Fox single pull

přehazovačka

Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

brzdové páčky

Sram Level, tooled reach adjust, lever pivot bushings

středové složení

Sram DUB BSA, sealed bearings, 73mm

představec

MDK, 6061 T6 Alloy, 31.8mm barbore, rise: +/-5°, length: size S: 60mm, size M: 70mm, size L: 80mm, size XL: 90mm

sedlo

Mondraker XC Series, steel rail

náboj zadní

Mavic, Boost 12x148mm, ID360 Ratchet system, IS 6 bolts

kazeta

Sram XG-1230, 11-50T, 12s

ráfky

Mavic Crossmax 29, 25mm internal width, welded rim, hookless, tubeless ready, 24 spokes

a151

010.23029

gripy

Onoff Twin, 1lock-on, 135mm

rám

Chrono 29 Stealth full Carbon, XC Forward Geometry, 73mm BSA bottom bracket, tapered head tube, HHG Internal Cable routing, Boost 12x148mm rear axle, Comfort Flat chainstays (Flatstays) design

hlavové složení

Onoff Titan tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41.8x30.5x8x45°x45°, bottom 51.9x40x8x45°x45°

řazení

Sram Trigger NX Eagle, 12s, X-Actuation 1:1

kličky

Truvativ Stylo 6K Eagle, 12s, Boost, DUB axle, Direct Mount chain ring, S size: 170mm, M/L/XL size: 175mm

řídítka

Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 760mm, 9° backsweep, 0° upsweep, 31.8mm barbore

sedlovka

Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 27.2mm, length 400mm

náboj přední

Mavic, Boost 15x110mm, IS 6 bolts

řetěz

Sram SX Eagle, 12s, Powerlock

dráty

Mavic straight-pull double butted, contactless lacing

pláště

Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead

obj.c.

010.23029

přední brzda


Sram Level T, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad

zadní brzda
Sram Level T, 2 piece caliper, Centerline 160mm IS 6 bolts
one-piece rotor, steel-backed organic pad

převodník
34T, steel, X-Sync 2

patka k přehazovačce
Mondraker M068

Geometrie

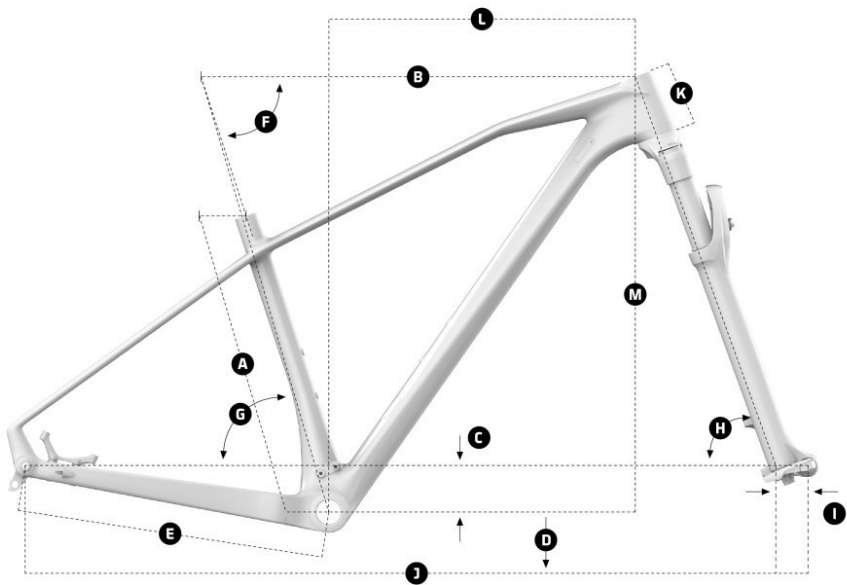

XC PRO
CHRONO CARBON

Size	S	M	L	XL
A Seat Tube Length	395 mm	430 mm	470 mm	520 mm
B Top Tube Length	590 mm	610 mm	630 mm	650 mm
C Bottom Bracket Drop	-65 mm	-65 mm	-65 mm	-65 mm
D Bottom Bracket Height	305 mm	305 mm	305 mm	305 mm
E Chainstay Legth	430 mm	430 mm	430 mm	430 mm
F Seat Tube Angle, Actual	72°	72°	72°	72°
G Seat Tube Angle, Effective	73.5°	73.5°	73.5°	73.5°
H Head Tube Angle	70°	70°	70°	70°
I Fork Offset	44 / 51 mm	44 / 51 mm	44 / 51 mm	44 / 51 mm
J Wheelbase	1086 mm	1106 mm	1127 mm	1148 mm
K Head Tube Length	85 mm	90 mm	100 mm	115 mm
L Reach	411 mm	430 mm	447 mm	463 mm
M Stack	605 mm	610 mm	619 mm	632 mm

Fotogalerie

