

FOXY CARBON R 29 MIND, CHERRY RED/CARBON, 2022

obj. č: 010.22316



Doporučená cena

155.999 Kč

Akční cena

101.999 Kč

Technické specifikace

vyráběné velikosti S: 380mm / M: 420mm / L: 450mm / XL: 500mm	hmotnost 14,1 Kg
rám Foxy 29 Stealth Air full Carbon, Zero Suspension System, 150mm travel, Forward Geometry, aluminium CSC upper link with carbon bridge, Boost 12x148mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, HHG internal cable routing, Enduro MAX sealed bearings, shock mudguard, ISCG 05, custom frame protectors. *Optional Geometry Kit	vidlice Fox 36 29 Float FIT GRIP EVOL Rhythm, 160mm, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: sweep adjust compression, low-speed rebound, air preload
hlavové složení Acros custom for 1-1/2	přehazovačka Sram Trigger NX Eagle, 12s, X-Actuation 1:1
řazení Sram Trigger NX Eagle, 12s, X-Actuation 1:1	brzdové páčky Sram G2 R, tool-free reach adjust
kliky Truvativ Descendant 6K Eagle, Boost, DUB axle, Direct mount chain ring, S/M size: 170mm, L/XL size: 175mm	středové složení Sram DUB BSA, sealed bearings, 73mm
řídítka Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore	představec Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore
sedlovka Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm	sedlo SDG BEL-AIR 3.0, LPU foam, steel rails
náboj přední DT 370, Boost 15x110mm, IS 6 bolts	náboj zadní DT 370, Boost 12x148mm, 18T Ratched LN system, IS 6 bolts
řetěz Sram NX Eagle, 12s, Powerlock	kazeta Sram XG-1230, 11-50T, 12s
dráty DT Champion, straightpull	ráfky DT Swiss E1900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes
pláště Maxxis Minion DHF 29x2.5 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead, Maxxis Minion DHR II 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead	a151 010.22316
obj.c. 010.22316	gripy Onoff Diamond, 1lock-on, 135mm

tlumič
Fox Float-X LV Performance, 205x65mm. Settings: compression 2 positions lever, low-speed rebound, air preload. Trunnion top mount, 30x8mm bottom bushings

zadní brzda
Sram G2 R, 4-piston caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pads

převodník
32T, steel, X-Sync 2


ostatní
*Optional Geometry kit: steering cups: +/- 1°

přední brzda
Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

nastavení tlumiče
Light compression, light rebound, air volume spacer 0.6

patka k přehazovačce
Sram UDH

Geometrie

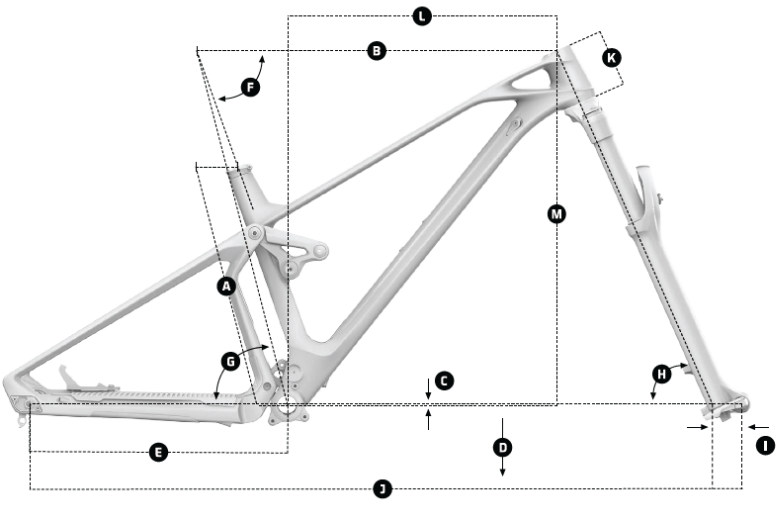

A	Seat Tube Length
B	Top Tube Length
C	Bottom Bracket Drop
D	Bottom Bracket Height
E	Chainstay Length
F	Seat Tube Angle, Actual
G	Seat Tube Angle, Effective
H	Head Tube Angle
I	Fork Offset
J	Wheelbase
K	Head Tube Length
L	Reach
M	Stack

ENDURO
FOXY CARBON (STANDARD)

Size	S	M	L	XL
A Seat Tube Length	375 mm	415 mm	445 mm	500 mm
B Top Tube Length	600 mm	620 mm	650 mm	670 mm
C Bottom Bracket Drop	-23	-23	-23	-23
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Length	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	70.5°	70.5°	70.5°	70.5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65°	65°	65°	65°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1203 mm	1227 mm	1253 mm	1279 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	445 mm	465 mm	485 mm	505 mm
M Stack	615 mm	623 mm	637 mm	651 mm

ENDURO
FOXY CARBON (LOW)

Size	S	M	L	XL
A Seat Tube Length	375 mm	415 mm	445 mm	500 mm
B Top Tube Length	600 mm	620 mm	650 mm	670 mm
C Bottom Bracket Drop	-28	-28	-28	-28
D Bottom Bracket Height	345 mm	345 mm	345 mm	345 mm
E Chainstay Length	445 mm	445 mm	445 mm	445 mm
F Seat Tube Angle, Actual	70°	70°	70°	70°
G Seat Tube Angle, Effective	75.5°	75.5°	75.5°	75.5°
H Head Tube Angle	64.5°	64.5°	64.5°	64.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1210 mm	1233 mm	1260 mm	1286 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	440 mm	460 mm	480 mm	500 mm
M Stack	617 mm	627 mm	641 mm	656 mm

Fotogalerie

