

RAZE, BLACK/DIRTY WHITE, 2023

obj. č: 010.23077



Doporučená cena

87.499 Kč

Akční cena

65.999 Kč

Technické specifikace

vyráběné velikosti S: 380mm / M: 420mm / L: 470mm / XL: 510mm	rám Raze 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero Suspension System, 130mm travel, Forward Geometry, one piece Monoblock upper link, Boost 12x148mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, telescopic seatpost internal routing, MAX capacity sealed bearings, ISCG 05
vidlice RockShox 35 Gold 29 RL, 150mm, Solo Air, tapered steerer tube, Boost 15x110mm axle, 35mm steel stanchions, 44mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload	hlavové složení Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
přehazovačka Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1	řazení Sram Trigger SX Eagle, 12s, X-Actuation 1:1
brzdové páčky Sram Level T, Direct Link actuation, tooled reach adjust, lever pivot bushings	kliky Sram SX Eagle, Boost, DUB axle, Direct Mount chain ring, S/M size: 170mm, L/XL size: 175mm
středové složení Sram DUB BSA, sealed bearings, 73mm	řídítka Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore
představec Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore	sedlovka Onoff Pija dropper internal, diameter 31.6mm, S size: 405x95-125mm, M size 458x120-150mm, L size: 498x140-170mm, XL size: 498x140-170mm
sedlo MDK series PU 2023	náboj přední Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts
náboj zadní Formula DHT148 Boost 12x148mm, sealed bearings, IS 6 bolts	řetěz Sram SX Eagle, 12s, Powerlock
kazeta Sram PG-1210, 11-50T, 12s	dráty CN round stainless steel
ráfky MDK-EP1 29, 30mm internal width, tubeless ready, 32 spokes	pláště Maxxis Dissector 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead / Maxxis Aggressor 29x2.3, tubeless ready, dual compound, Exo protection, 60TPI, folding bead
a151 010.23077	obj.c. 010.23077

gripy
Onoff Twin, 1lock-on, 135mm

tlumič
Fox Float DPS LV EVOL Performance, 205x57.5mm. Settings: rebound, 3-position compression adjustment (Open/Mid/Lock), air preload. Trunnion top mount, 30x8mm bottom bushings

přední brzda
Sram Level T, 2 piece caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pad


zadní brzda
Sram Level T, 2 piece caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pad

nastavení tlumiče
Light compression, light rebound, air volume spacer 0.6

převodník
32T, steel, X-Sync 2

patka k přehazovačce
Sram UDH

Geometrie

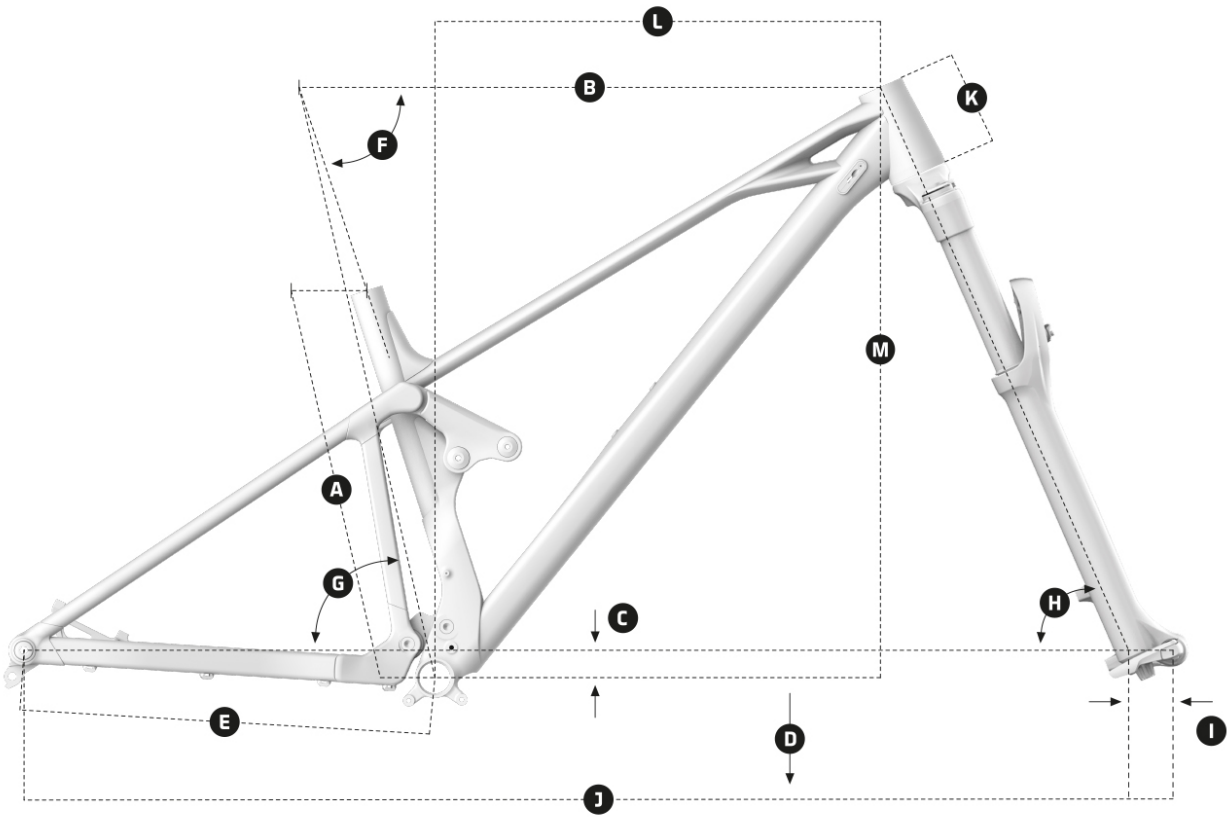

TRAIL RAZE

Size	S	M	L	XL
A Seat Tube Length	375 mm	415 mm	445 mm	490 mm
B Top Tube Length	594 mm	614 mm	638 mm	658 mm
C Bottom Bracket Drop	-29 mm	-29 mm	-29 mm	-29 mm
D Bottom Bracket Height	340 mm	340 mm	340 mm	340 mm
E Chainstay Length	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	72°	72°	72°	72°
G Seat Tube Angle, Effective	76.5°	76.5°	76.5°	76.5°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1197 mm	1216 mm	1246 mm	1266 mm
K Head Tube Length	100 mm	100 mm	120 mm	120 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	623 mm	623 mm	641 mm	641 mm

Fotogalerie

