

CRAFTY CARBON RR SL MIND, RACING SILVER/DIRTY WHITE, 2023

obj. č.: 010.23360

Doporučená cena

344.999 Kč

Akční cena

264.999 Kč



Technické specifikace

vyráběné velikosti

S: 380mm / M: 420mm / L: 450mm / XL: 490mm

vidlice

Fox 36 29 Float GRIP2 Factory Kashima, 160mm, e-bike optimized, tapered steerer tube, Boost 15x110mm axle, 44mm offset, 68mm OD crown. Settings: high and low-speed compression, high and low-speed rebound, air preload

přehazovačka

Sram XX1 Eagle AXS, Type 2.1 roller bearing clutch, cage lock, long carbon cage, 1x12s, X-actuation 1:1 with battery cover

brzdové páčky

Sram Code RSC, SwingLink and lever pivot bearings, tools-free reach and contact point adjust

řídítka

Onoff Krypton Carbon 1.0, rise: 25mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore

sedlovka

RockShox Reverb Stealth AXS, diameter 31.6mm, S size: 390x125mm, M size: 440x150mm, L/XL size: 440x170mm

náboj přední

e*thirteen Boost 15x110mm, triple-sealed, fully machined aluminum, IS 6 bolts

řetěz

Sram GX Eagle, 12s, Powerlock

dráty

e*thirteen custom Hive triple-buttressed black steel, alloy nipples, nipple washers

pláště

Maxxis Rekon 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead

rám

Crafty Stealth Air full Carbon, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers. MIND System (EU only)

hlavové složení

"Acros custom for 1-1/2"" head tube, angular contact bearings 40x52x7, Internal cable routing"

řazení

Sram Eagle AXS Rocker paddle, 12s

kliky

E.13 TRS Race carbon ebike, 165mm

představec

Onoff Krypton FG 30mm, CNC, 31.8mm barbore

sedlo

FIZIK Terra Aidon X1 145mm

náboj zadní

e*thirteen Boost 12x148mm, triple-sealed, fully machined aluminum w/6-degree engagement, IS 6 bolts, XD freehub

kazeta

Sram XG-1295, 10-52T, 12s

ráfky


e*thirteen Race Carbon Enduro IW30, Hookless carbon rim, 30mm internal width, tubeless ready, 28 spokes

a151

010.23360

obj.c. 010.23360	gripy Onoff Desert, 1lock-on, 135mm
tlumič Fox Float DPS Factory Kashima evol LV, 205x65mm. Settings: Compression 3 positions lever, low-speed compression, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings	přední brzda Sram Code RSC, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads
zadní brzda Sram Code RSC, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads	nastavení tlumiče Medium compression, Medium rebound, 0.4 volume spacer
převodník Sram X-Sync 2 Eagle 34T, alloy, narrow-wide, 104 BCD	patka k přehazovačce Mondraker M068
motor+baterie Bosch Performance Line CX Cruise (25Km/h) Smart System , Bosch Performance Line CX Cruise (25Km/h) Smart System , Bosch Kiox 300 / Bosch Mini Remote / Bosch System Controller	

Geometrie

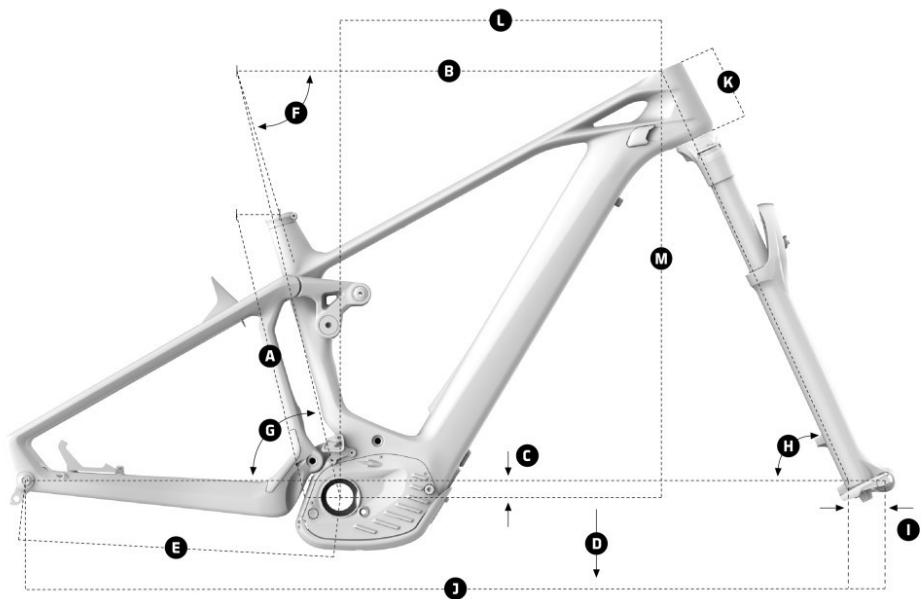

e-MTB ENDURO
CRAFTY CARBON

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	480 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73. 5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1265 mm	1285 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm

Fotogalerie

